



# Modula ONEPICK

Think Vertical, Think Modula





Modula **ONEPICK** 

## Top level automation

OnePick is the Vertical Lift Module that works without an operator because its bay is completely automatic!


OnePick integrates seamlessly with material handling systems like conveyor belts, rollers, AGVs, AGCs and others.

With OnePick, picking is fully automatic and safe.

Thanks to its specially designed gripper it handles the products stored in boxes or bins without the need of operators, antropomorphic robots or other external handling systems.

OnePick is the ideal system for stocking in the same warehouse boxes, bins and containers with:

- Different weights
- Different volumes
- Different sizes
- Different dimensions

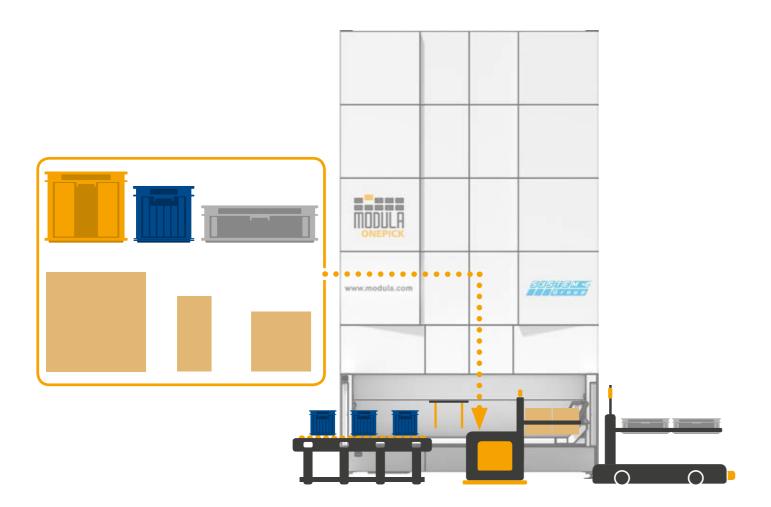

## What it is and how it works

OnePick is a Modula Lift (VLM) with a special picking bay equipped with a cartesian robot moving on 2 axes (X and Y).

The bay has a set unit height so it integrates seamlessly and automatically with rollers, conveyors, belts and other systems.

In the OnePick bay, a grip device retrieves the box and places it in front of the unit on a external surface.

Like a Modula Lift, it

- Saves floor space
- Stores items safely
- Automatically manages inventory
- Tracks items
- Saves picking time
- Prevents retrieval and delivery phase errors



Unit height:

from 3.300 mm to 16.100 mm

Unit height increment:

200 mm

Tray storage pitch:

25 mm

Tray width:

from 1.900 mm to 4.100 mm

Tray depths:

654 mm & 857 mm

Net tray payload: 250-500-750-990 kg

Total net payload:

up to 90.000 Kg

Number of bays:

up to 3 OnePick, also on the same side and displaced

Load-bearing structure in zinc-coated steel Eagle steel-reinforced toothed belt transmission Elevator guiding system with 6 HDPE rollers per side Multiple payload tray management



Maximum load unit height: 360 mm

**Maximum load unit weight:** 

25 kg (depending on the box dimensions)


Option for opposed bays

Dynamic tray height storage

Retrofit possible on existing Lifts
(New Generation)

2





# Retrieval from multiple rows

The OnePick warehouse retrieves from multiple rows in the same tray.

An advanced system synchronizes the grip device and the tray movements.

This makes box retrieval extremely precise, even when the tray has a random geometric layout and/or on more than one row.

No matter what the tray layout is, it is perfectly reachable. OnePick technology translates into tray space optimisation, the entire surface is used, even when the boxes have different geometry, volumes or shapes. There is more: thanks to the Modula warehouse dynamic tray height storage, the spaces between trays can be optimised and boxes and containers of different unit heights can be stored with great flexibility and efficiency.

# Zero error, no waste - maximum efficiency.







# Never seen such flexibility!


OnePick trays are fitted with special accessories, like partitions and dividers to organise the trays to store a number of different boxes and containers.

Thanks to these accessories, the tray layout is incredibly flexible and easy to modify.

The dynamic tray height storage combined with 25 mm tray adjustability allows for an optimised usage of the VLM internal volume.


At every material intake, the VLM controls the height of the material, checks the available spaces inside the warehouse and selects the perfect storage location in order to minimize the internal space waste.

### No more useless gaps between the stored trays!

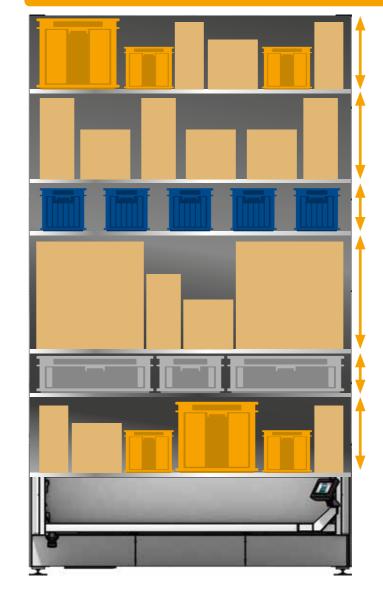








## A smart software

The OnePick combined with a handling system allows the installation of a VLM even in hard to reach, awkward areas, or areas a long way from the station where the items are needed.

OnePick requires Modula WMS software which, among other functions, maps the containers position in the tray. The grip device is guided by the defined mapping and retrieves fully automatically the required items.

Any material handling system is then able to carry them to another even remote station. Ideal for assembly lines, work islands, but also pick and pay, indabox or pick-up applications for e-commerce, self service or take away, automatic stores.











MA & MA-D	Model	Tray width (mm)	Tray depth (mm)	Tray wall height <i>(mm)</i>	Net tray payload <i>(kg)</i>	Unit footprint (Width x Depth) (mm)
	MA25	1.900	654	45 / 70 / 120	250	2.317x3.472
	MA25D	1.900	857	45 / 70 / 120	250	2.317x4.284
latti	MA50	1.900	654	70 / 120	500	2.317x3.472
	MA50D	1.900	857	70 / 120	500	2.317x4.284
	MA75	1.900	654	70 / 120	750	2.317x3.472
	MA75D	1.900	857	70 / 120	750	2.317x4.284
	MA1000	1.860	654	120	990	2.317x3.472
2.317 mm→	MA1000D	1.860	857	120	990	2.317x4.284

MC-D	Tray width (mm)	Tray depth (mm)	Tray wall height <i>(mm)</i>	Net tray payload <i>(kg)</i>	Unit footprint (Width x Depth) (mm)
MC25	2.500	654	45 / 70 / 120	250	2.917x3.472
MC25D	2.500	857	45 / 70 / 120	250	2.917x4.284
MC50	2.500	654	70 / 120	500	2.917x3.472
MC50D	2.500	857	70 / 120	500	2.917x4.284
MC75	2.500	654	70 / 120	750	2.917x3.472
MC75D	2.500	857	70 / 120	750	2.917x4.284
MC1000	2.460	654	120	990	2.917x3.472
MC1000D	2.460	857	120	990	2.917x4.284
	MC25 MC25D MC50 MC50D MC75 MC75D MC75D	Model (mm)  MC25 2.500  MC25D 2.500  MC50 2.500  MC50D 2.500  MC75 2.500  MC75D 2.500  MC75D 2.500  MC75D 2.500	Model         (mm)         (mm)           MC25         2.500         654           MC25D         2.500         857           MC50         2.500         654           MC50D         2.500         857           MC75         2.500         654           MC75D         2.500         857           MC1000         2.460         654	Model         (mm)         (mm)         (mm)           MC25         2.500         654         45 / 70 / 120           MC25D         2.500         857         45 / 70 / 120           MC50         2.500         654         70 / 120           MC50D         2.500         857         70 / 120           MC75         2.500         654         70 / 120           MC75D         2.500         857         70 / 120           MC1000         2.460         654         120	Model         Indy Model (mm)         Indy Model (mm)         Indy Model (mm)         payload (kg)           MC25         2.500         654         45 / 70 / 120         250           MC25D         2.500         857         45 / 70 / 120         250           MC50         2.500         654         70 / 120         500           MC50D         2.500         857         70 / 120         500           MC75         2.500         654         70 / 120         750           MC75D         2.500         857         70 / 120         750           MC1000         2.460         654         120         990

M	X & MX-D	Model	Tray width (mm)	Tray depth (mm)	Tray wall height <i>(mm)</i>	Net tray payload (kg)	Unit footprint (Width x Depth) (mm)
		MX25	3.100	654	45 / 70 / 120	250	3.517x3.472
		MX25D	3.100	857	45 / 70 / 120	250	3.517x4.284
Antitis .		MX50	3.100	654	70 / 120	500	3.517x3.472
	attender .	MX50D	3.100	857	70 / 120	500	3.517x4.284
-		MX75	3.100	654	70 / 120	750	3.517x3.472
		MX75D	3.100	857	120	750	3.517x4.284
		MX1000	3.060	654	120	990	3.517x3.472
3.517	7 mm —	MX1000D	3.060	857	120	990	3.517x4.284

ML	. & ML-D	Model	Tray width (mm)	Tray depth (mm)	Tray wall height <i>(mm)</i>	Net tray payload (kg)	Unit footprint (Width x Depth) (mm)
		ML25	4.100	654	70 / 120	250	4.517x3.472
		ML25D	4.100	857	70 / 120	250	4.517x4.284
MIT		ML50	4.100	654	120	500	4.517x3.472
	and a	ML50D	4.100	857	120	500	4.517x4.284
-		ML75	4.100	654	120	750	4.517x3.472
		ML75D	4.100	857	120	750	4.517x4.284
		ML1000	4.060	654	145	990	4.517x3.472
4.517 mm		ML1000D	4.060	857	145	990	4.517x4.284

6 \_\_\_\_\_\_ 7

Modula is present in 5 continents with dealers and branches located in over 50 countries.

#### MODULA S.p.A.

SEDE LEGALE
Via Ghiarola Vecchia, 73 - 41042
Fiorano Modenese (MO) ITALY
SEDE OPERATIVA
via San Lorenzo 41
Salvaterra di Reggio Emilia (RE)
Tel. +39 0522 774111
info@modula.com
www.modula.com

#### **MODULA STORAGE SOLUTIONS LIMITED**

38 Craven Street London - England - WC2N 5NG Tel. 0044 0844 902 8945 info@modula.com www.modula.com

Modula is part of

